


# FQSS 266-50

Diode pumped passively Q-switched solid state laser


- 266 nm
- single pulse
- 0.9 - 1.3 ns
- 1 – 100 Hz (up to 1 kHz optional)
- > 50 µJ

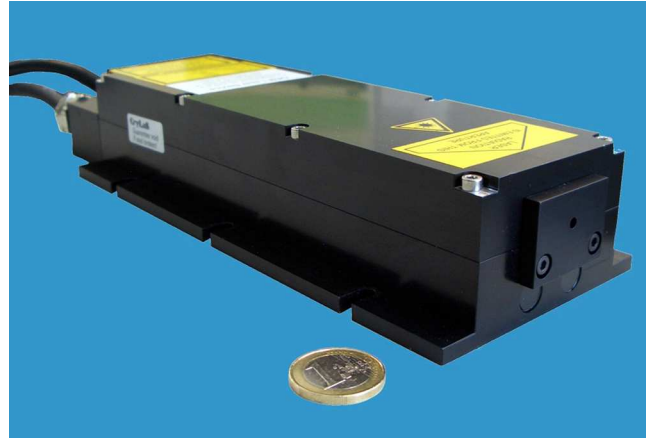


## biology · biomedicine · chemistry · analytics

<b>Optical Data</b>	Wavelength	266 nm
	Spatial Mode	TEM <sub>00</sub>
	M <sup>2</sup>	< 1.5
	Beam Divergence (full angle)	< 3.0 mrad
	Beam Ellipticity	< 1.5:1
	Waist Diameter	800 ± 200 µm (located at about 110mm inside the laser head)
	Beam Diameter	800 ± 200 µm (at laser exit)
	Peak Power	45 kW - 65 kW @ 1-100 Hz
	Pulse Energy	> 50 µJ @ 1 - 100 Hz (> 15µJ @ 1kHz Option)
	Pulse Repetition Rate (with external trigger)	1 - 100 Hz
	Pulse Width (FWHM)	0.9 - 1.3 ns
	Polarization Ratio	> 100:1, vertical
	Long term pulse energy stability (6 hrs)	< ± 2 %
	Pulse-To-Pulse Stability	< 1% rms (of pulse energy)
	Laser Classification	4 / IV
Residual 532nm Emission	< 0.5 % of output pulse energy	
<b>Optical Output</b>	Free Beam	
<b>Electrical Data</b>	Electrical Power Consumption	< 70 W
	Line Voltage	90 - 265 V AC (50-60 Hz) or 24 V DC
<b>Interface</b>	RS 232, USB	
<b>Miscellaneous</b>	Warm-up Time	< 10 min
	Operating Temperature	18 - 38 °C
	Laser Head Size	217 x 65 x 45 mm (core dimensions)
<b>Options</b>	Synchronization signal output (rise time < 2 ns)	
	Manual shutter	
	Manual or electrical driven wavelength switch 266 nm / 532 nm	
	Upgrade to 1 kHz repetition rate (parameters on request)	
	External telescope (e.g. M=5)	
Stand alone system (CDRH compliant)		

## Laser Head and Controller

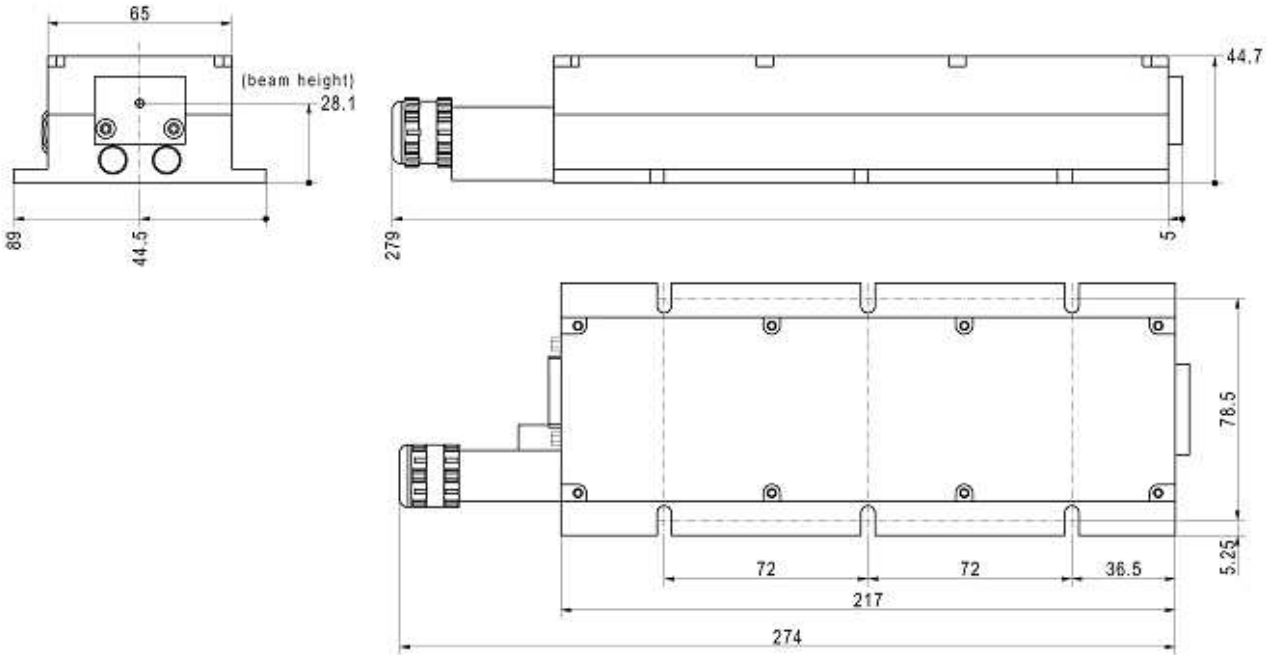

OEM-Controller

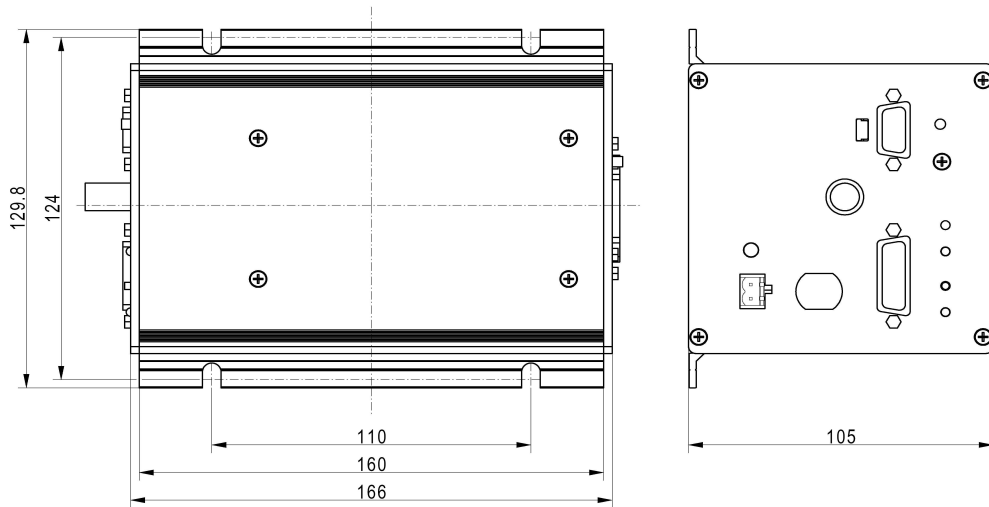

## Laser Safety Labels

The FQSS266-50 lasers are class 4 according to IEC 60825-1:2007

