


FTSS 355-50

Diode pumped passively Q-switched solid state laser


- 355 nm
- single pulse
- 0.9 - 1.3 ns
- 1 – 100 Hz (up to 1 kHz optional)
- > 70 µJ

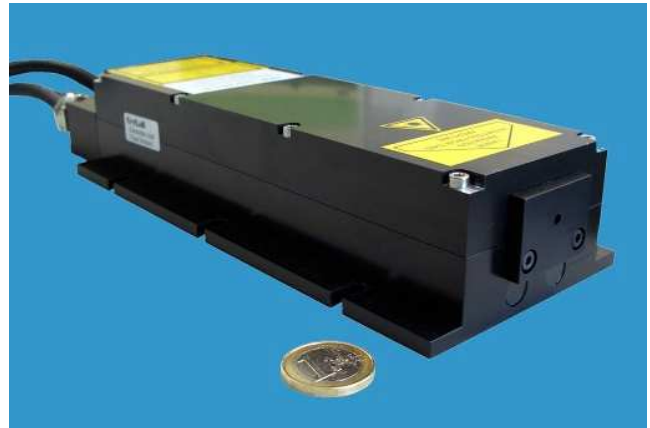


biology · biomedicine · chemistry · analytics

Optical Data	Wavelength	355 nm
	Spatial Mode	TEM ₀₀
	M ²	< 1.5
	Beam Divergence (full angle)	< 3.5 mrad
	Beam Ellipticity	< 2:1
	Waist Diameter	280 ± 80 µm (located at about 110mm inside the laser head)
	Beam Diameter	450 ± 150 µm (at laser exit)
	Peak Power	50 kW - 80 kW @ 1 - 100 Hz
	Pulse Energy	> 70 µJ @ 1 - 100 Hz (> 25µJ @ 1kHz option)
	Pulse Repetition Rate (with external trigger)	1 - 100 Hz
	Pulse Width (FWHM)	0.9 - 1.3 ns
	Polarization Ratio	> 100:1, vertical
	Long term pulse energy stability (6 hrs)	< ± 2 %
	Pulse-To-Pulse Stability	< 1 % rms (of pulse energy)
Laser Classification	3B / IIIb	
Residual 532nm Emission	< 0.2 %, (0,0025 % on request)	
Optical Output	Free Beam	
Electrical Data	Electrical Power Consumption	< 70 W
	Line Voltage	90 - 265 V AC (50-60 Hz) or 24 V DC
Interface	RS 232, USB	
Miscellaneous	Warm-up Time	< 15 min
	Operating Temperature	18 - 38 °C
	Laser Head Size	217 x 65 x 45 mm (core dimensions)
Options	SMA-connector for fiber with core diameter ≥ 70 µm	
	Synchronization signal output (rise time < 2 ns)	
	Manual shutter	
	Manual or electrical driven wavelength switch 355 nm / 532 nm	
	Upgrade to 1 kHz repetition rate (parameters on request)	
	External telescope (e.g. M=5)	
	Manual or electrical driven attenuator	
Stand alone system (CDRH compliant)		

Laser Head and Controller


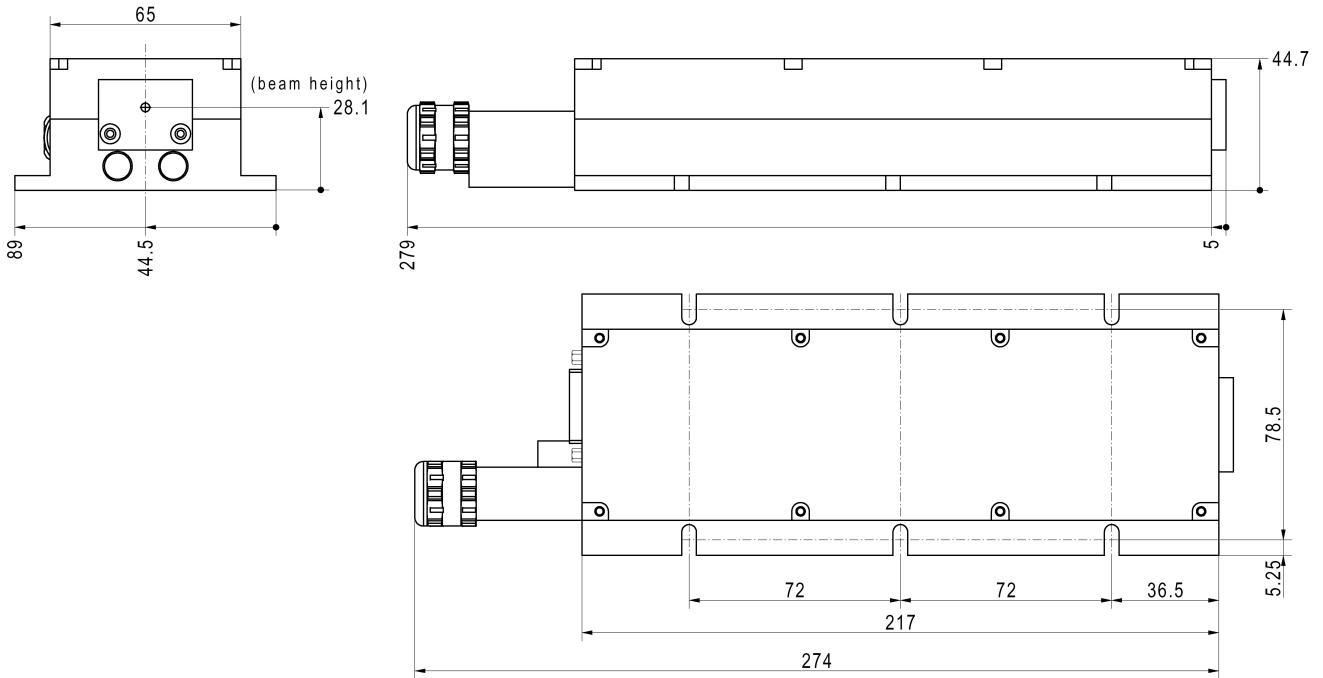


OEM-Controller

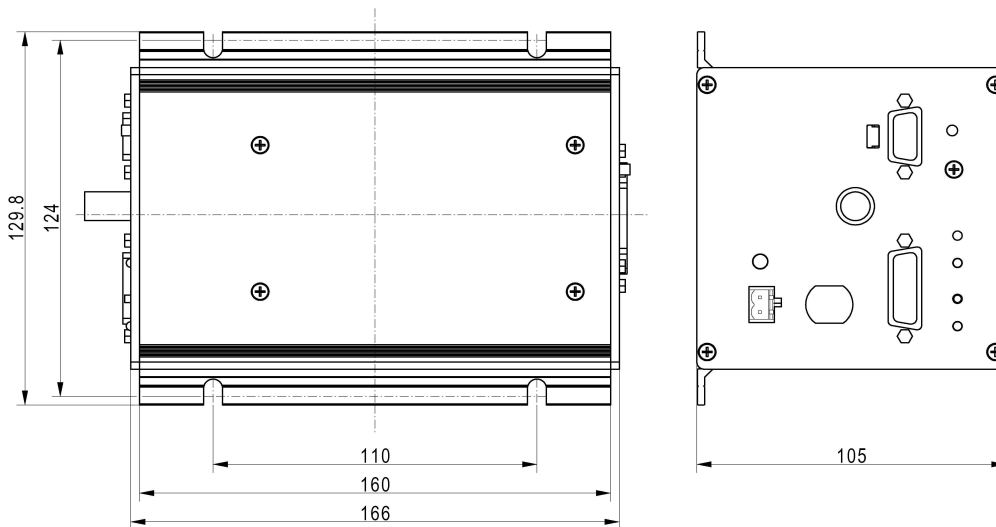

Laser Safety Labels

The FTSS355-50 lasers are class 3B according to IEC 60825-1:2007

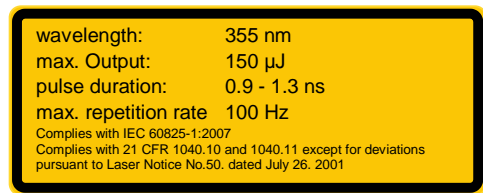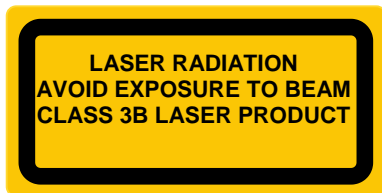

Typical behavior of the laser energy with different repetition rates

Typical energy vs. repetition rate of the FTSS 355-50 laser system (1 - 200Hz)

