

MOPA 532-250

Diode pumped passively Q-switched solid state laser



- 532 nm
- Single Pulse
- ≤ 1.2 ns
- 1 – 1000 Hz
- > 250 μ J
- External / Internal Trigger Mode



biology · biomedicine · chemistry · analytics

	Wavelength	532 nm
	Peak Power	> 200 kW @ 1000 Hz
	Pulse Energy	> 250 μ J @ 1000 Hz
	Beam Divergence (full angle)	< 3.0 mrad
	Beam Ellipticity	$< 2:1$
	Beam Diameter	0.7 ± 0.3 mm (at laser exit)
	Spatial Mode	TEM ₀₀
	Pulse Repetition Rate (with external trigger)	1 - 1000 Hz
	Pulse Width (FWHM)	≤ 1.2 ns
	Polarization Ratio	$> 100:1$, vertical
	Pulse Energy Stability (averaged over 8 hrs)	± 3 %
	Pulse-to-Pulse Energy Stability (over 60 sec)	± 3 % (< 1 % rms)
	Laser Classification	3B / IIIb
Optical Output	Free Beam	
Electrical Data	Electrical Power Consumption	< 150 W
	Line Voltage	90 - 265 V AC (50-60 Hz)
Interface	USB	
	BNC connector for external triggering (TTL)	
	SMB connector for 24 V DC output	
Miscellaneous	Warm-up Time	< 10 min
	Operating Temperature	18 - 38 °C
	Laser Head Size	101 x 102 x 283 mm (H x W x L)
	Stand-Alone Unit Size	180 x 236 x 316 mm (H x W x L)
Options	Multimode fiber coupling	
	Synchronization signal output (rise time < 2 ns)	
	Electrical or manual wavelength switch (532nm – 1064nm) or electrical beam blocker	
	External telescope (beam expander) / Electrical or manual attenuator on request	


Laser Head and Controller

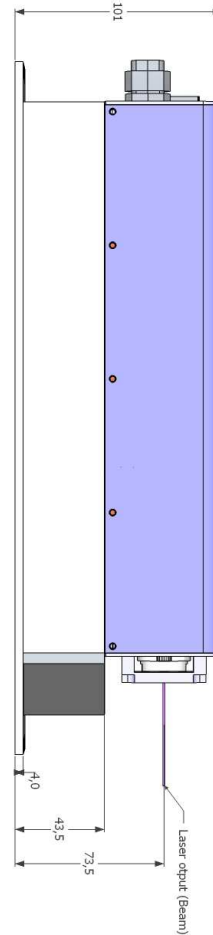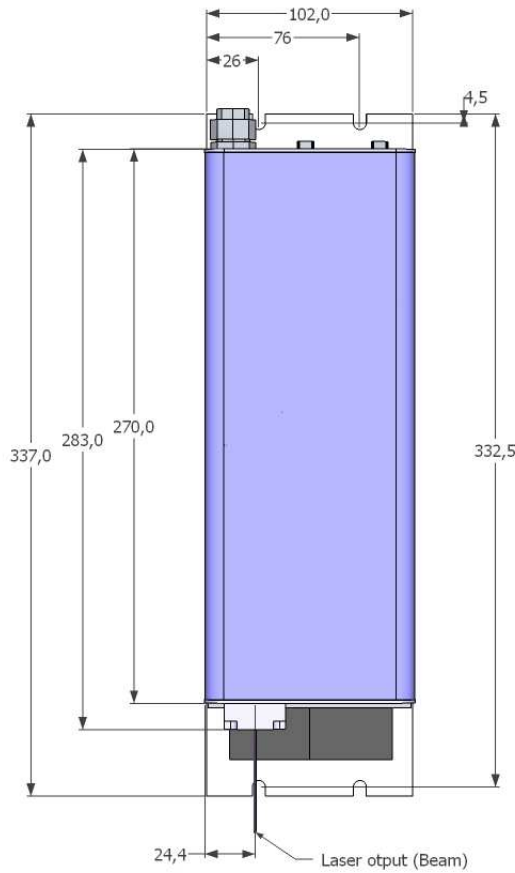

Front panel of the Stand-Alone unit
(width = 236; height = 180; length = 316;
all dimensions in mm)

Laser Safety Labels

The MOPA 532-250 lasers are class 3B / IIIb according to IEC 60825-1:2007

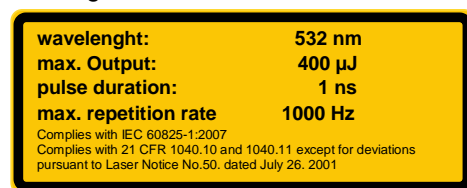

August, 2010